



Husqvarna PG 830 RC

The PG 830 RC is the largest and most powerful remotecontrolled floor grinder in the Husgvarna PG-range. The remote control sets the operator free to manage hoses and cables while still grinding, for up to 40% higher productivity. The motorised drive also simplifies transportation. A new 20 hp / 15 kW motor is available in the range which means power is up by 36% compared to the 11 kW motor. This is a powerful choice for most grinding jobs, both industrial and commercial. The planetary drive system and the improved, Husqvarnaonly Dual Drive Technology™ deliver extreme productivity. Adjustable weights for extra grinding pressure and LED lights come as option. Suitable for all applications: floor prep, grinding and polishing. The motorised drive enables easy transportation, improved ergonomics and outstanding grinding results. The PG 830 RC is the ultimate choice for the HiPERFLOOR® concrete polishing system. To maximise reliability and reduce maintenance, the vital components of the PG 830 are protected against dust and slurry inside the hermetically sealed grinding head and electrical cabinet.

١	V	1	0)1	t	0	ľ	

Rated input power	16,5 kW
Rated current	30 A
Voltage	380-415 V
Phases	3
Pins	3P+E

0the

Grinding disc diameter	270 mm
Direction of rotation	Independent FWD/REV direction control on both grinding discs and planetary head.
Number of grinding discs	3
Dimensions	
Product size length	1410 mm
Product size width	830 mm
Product size height	1155 mm
Weight	652 kg

Articles for PG 830 RC

Husqvarna PG 830 RC 967 97 79-01

Enhanced Dual Drive Technology™

Husqvarna's unique Dual Drive Technology $^{\text{\tiny{M}}}$ has now even higher disc speed capabilities. It enables you to individually control the speed and direction of the disc rotation and the speed and direction of the grinding head.

Sealed to last



Sealed grinding head with 1000 hrs service interval. No dust or water can intrude to damage components.

Protected electronics




Dust sealed electrical cabinet with external cooling technology.

Low maintenance, smooth operation



Re-designed Dual Drive Technology $^{\text{m}}$ transmission, fully sealed against dust. Self lubricating drive chain.

Recommended tools for PG 830 RC

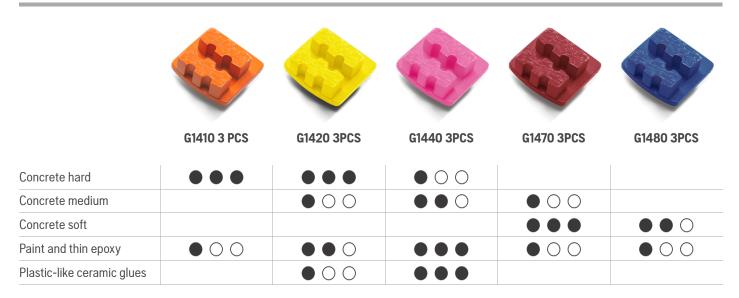

Porous ceramic glues				• • •	$\bullet \bullet \bigcirc$
Rain-damaged concrete				• • 0	• • •
Semi-polished concrete	• • •	• 0 0			
Thick epoxy	\bullet \circ \circ	• 0 0	• • •	• 0 0	
Vinyl glues	• 0 0	• • 0	• • •	• 0 0	• 0 0











P1200	series	for	PG
m	achine	25	

BHT 270

CP 1200 series

HiperFlex FP40

HiperFlex FP80

	machines				
Concrete				•••	
Concrete hard	• • 0	• • •	• • ○	• • •	
Concrete medium	• • •	• • •	• • •	• • 0	
Concrete soft	• • 0	• • •	• • ○		
Marble					• • •
Paint and thin epoxy		• • •		• • 0	
Plastic-like ceramic glues		• • •		• • 0	
Porous ceramic glues		• • •			
Rain-damaged concrete		• • •			
Semi-polished concrete		• • •			
Terrazzo	• 0 0				• • •
Thick epoxy		• • •			
Vinyl glues		• • •		• • •	



HiperFlex FT80

Concrete	• • •
Concrete medium	$\bullet \bullet \bigcirc$
Concrete soft	• • •
Terrazzo	• • •